

# SPEC-D *Tuning*

## 1997-2003 FORD EXPEDITION F150 HEADLIGHT INSTALLATION INSTRUCTION



- \*If you experienced any difficulties that the instruction did not cover, Please seek local auto shop for advise.
- \*Please wear protection before you work on your vehicle.
- \*An assistant is helpful when removing the front bumper.
- \*Please be careful while working with the bumper or body part to avoid scratching.
- \*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED



\*Phillips Screwdriver



\*Flat-tip screwdriver



\*Diagonal cutter

### **Product Part Number:**

2LHP-F15097B-TM

2LHP-F15097JMB-TM



## INSTALLATION INSTRUCTION



1. Remove the bolt from corner light (BOTH SIDE)



2. Pull out one latch frist (BOTH SIDE)



3. Then pull out the other latch. Afet that, pull out the corner light and headlight (BOTH SIDE)




4. Remove the light bulb from corner, then disconnect connectors from headlights (BOTH SIDE)






If your headlights don't have HALO or L.E.D. You can skip Step 5  
 5. please see the Halo and L.E.D. installation instruction

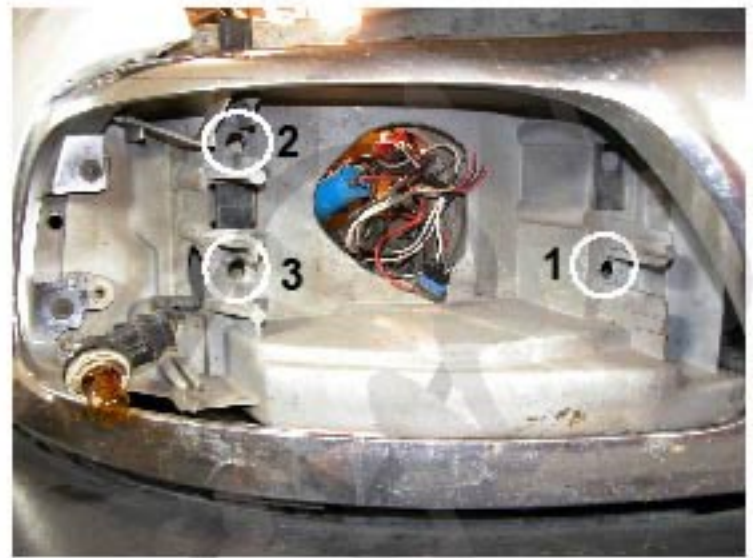

6. Please gently align the bolts on the headlights to the mounting holes (circle in the picture above) on your vehicle (please be extremely careful during the installation due to the mounting hole can be damaged easily)

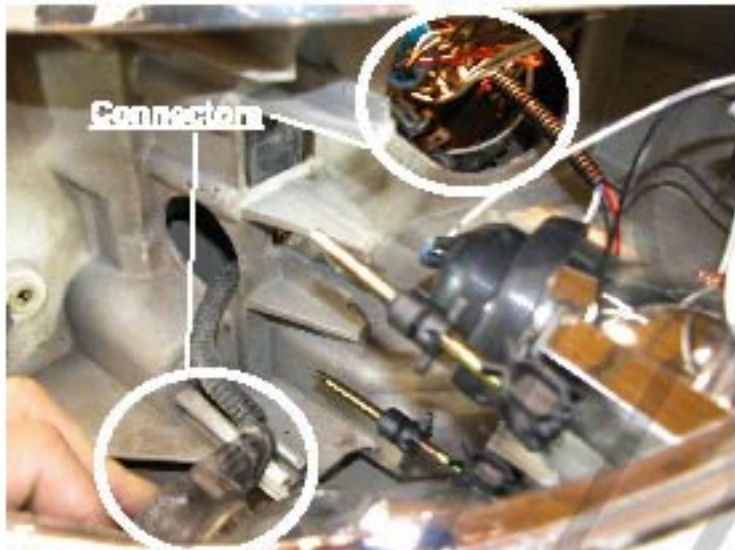

7. Connect connectors from headlight (BOTH SIDE)



8. Install the headlight (BOTH SIDE)



9. Lock one latch frist (BOTH SIDE)



10. Then lock the other latch (BOTH SIDE)



11. Install the bolt from corner light (BOTH SIDE)

12. Complete the installation

SPEC DTuning