

SPEC-D *Tuning*

1998-2005 VOLKSWAGEN BEETLE PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS



If you experience any difficulties that the instruction did not cover. Please seek local auto shop for advise. Please wear protection before you work on your vehicle.

An assistant is helpful when removing the front bumper.

Please be careful while working with the bumper or body part to avoid scratching.

Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

Phillips Screwdriver

Pocket Flat Tip Screwdriver

Handy Remover

IF YOUR HEADLIGHT IS HALO TYPE, YOU ALSO NEED:

Wire Stripper

Wire Crimper

4 Blue Quick Splice Wire Connectors

4 Blue Male Quick Wire Connectors

4 Blue Female Quick Wire Connectors

2 Red Wires (8 inch)

2 Black Wires (8 inch)

Product Part Numbers:

LHP-BEE98JM-TM

LHP-BEE98JMB-TM

LHP-BEE98-TM

LHP-BEE98B-TM






- *If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.
- *Please wear protection before you work on your vehicle.
- *An assistant is helpful when removing the front bumper.
- *Please be careful while working with the bumper or body part to avoid scratching.
- *Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



1. Open the hood

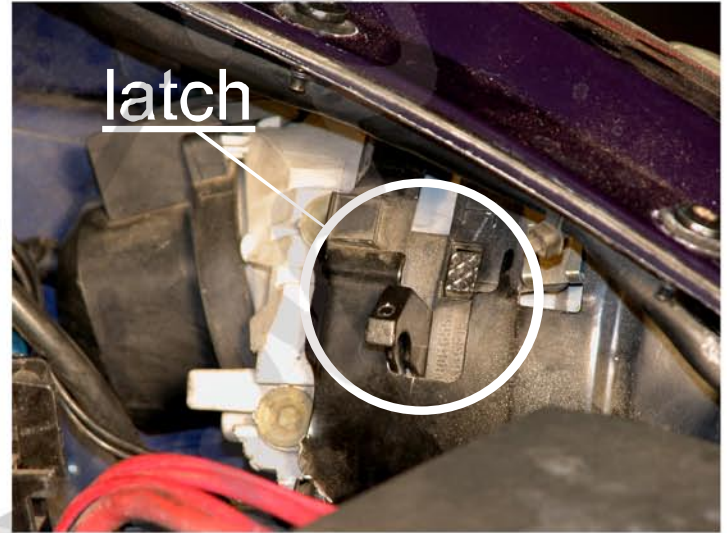

2. There is a latch that needs to be unlocked first



3. Use a flat tip screwdriver to push down the button



4. Pull the latch to unlock the headlight



5. Pull out the headlight slightly, just enough to see the back of the headlight



6. Remove the connectors from the headlight



7. Remove the headlight



8. Bring the projector headlights to the vehicle and connect the headlight connector



9. Install the headlights



10. Push the latch back to the original spot to lock the headlight



11. Please repeat the picture order from 1 to 11 for the opposite side



12. The installation now is complete

SPEC TUNING